

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
Taiwan

Tel.: 886-2-8221-2567

Fax.: 886-2-2225-7268

Techfuse**PTC Devices**

Resettable Fuse

PRODUCT: nSMD110

DOCUMENT: QR0429

ECN. NO.:

REV LETTER:

REV DATE: 2012-8-3

PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:

Meets EIA Specification RS186-9E

And ANSI/J-STD-002 Category 3.

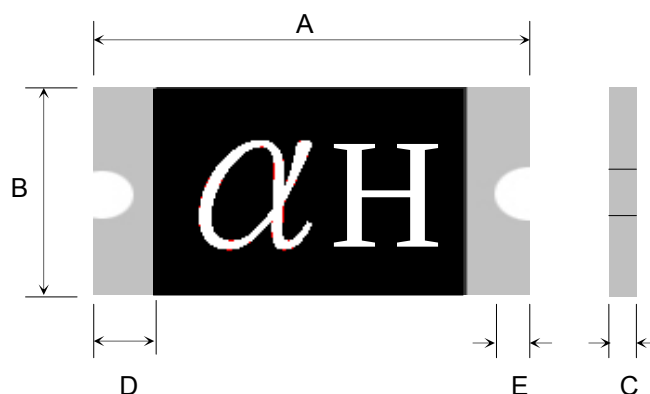
Terminal Pad Materials:

Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

Part Identification

nSMD110 = α H**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
nSMD110	α H	3.00	3.50	1.50	1.80	0.40	0.80	0.15	0.10

Unit:mm**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	$V_{\max}$ (Vdc)	$I_{\max}$ (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Max. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{\min}$ (Ω)	$R_{\max}$ (Ω)
nSMD110	α H	6.0	100	1.10	2.20	0.6	8.0	0.30	0.050	0.250

Order Information**Packaging**

SMD1206	110	Tape & Reel Quantity	
Product name	Hold	Max	
Size 3216 mm / 1206 mils	Current	voltage	5000 pcs/reel
SMD: surface mount device	1.10A		

Recognitic UL Pending.