

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
Taiwan, R.O.C.

Tel.: 886-2-8221-2567

Fax.: 886-2-2225-7268

Techfuse
PTC Devices
Resettable Fuse

PRODUCT: R60-065

DOCUMENT: QR0429

ECN. NO.:

REV LETTER:

REV DATE: 2020/12/16

PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:

meets UL94 V-0 Requirements

Lead-free,RoHS compliant

Lead Material:

Tin plated copper, 24AWG (0.020"Dia)

Marking:

Sea&land Logo



R60 - Radial type 60V

065 - hold current

XXXX - Date code & Factory code

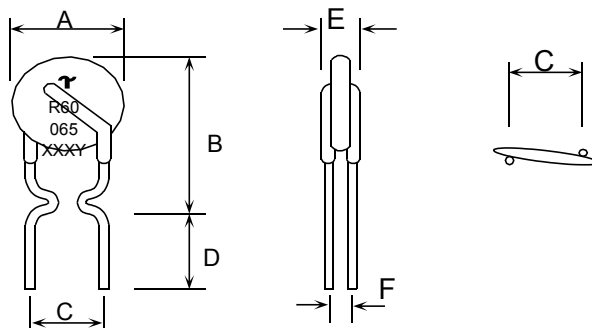


TABLE I. DIMENSIONS:

	A	B	C	D	E	F
	MAX	MAX	TYP	MIN	MAX	MAX
mm	9.7	14.5	5.1	7.6	3.1	1.5
in	0.38	0.57	0.20	0.30	0.12	0.06

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{1max} (Ω)
R60-065	60	40	0.65	1.30	0.88	3.25	5.3	0.250	0.720

Order information

Packing

R60	065	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current (A)	K=Kink leads S=Straight leads	R= Tape & Reel U= Bulk packaged	R60-065	3000	500

Tape & Reel packaging per EIA468-B stan

Recognition: UL/TÜV, approved.

E201504/E319079

R 50274672

2015/863/EU

EN14582

