

SEA&LAND ELECTRONIC CORP.

13F.,No.120-10,
Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,
Taiwan, R.O.C.

Tel.: 886-2-8221-2567

Fax.: 886-2-2225-7268

Techfuse

PTC Devices

Resettable Fuse

PRODUCT: R60-375

DOCUMENT: QR0429

ECN. NO.:

REV LETTER:

REV DATE: 2020/12/16

PAGE NO.: 1 of 1

Specification Sheet

Insulating Material:
meets UL94 V-0 Requirements

Lead-free,RoHS compliant

Lead Material:
Tin plated copper, 20AWG (0.032"Dia)

Marking:

ChipFast Logo

R60 - Radial type 60V

375 - hold current

XXXY - Date code & Factory code

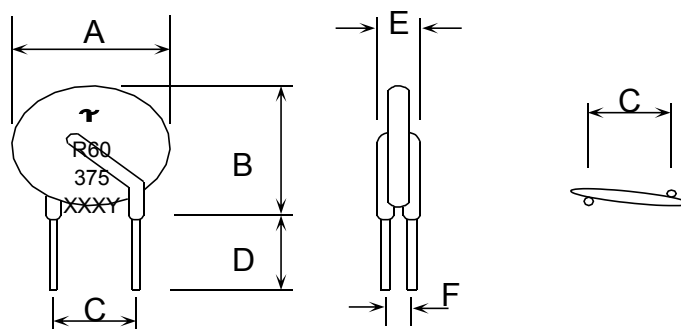


TABLE I. DIMENSIONS:

	A MAX	B MAX	C TYP	D MIN	E MAX	F MAX
mm	28.5	33.5	10.2	7.6	3.1	2.0
in	1.12	1.32	0.40	0.30	0.12	0.08

TABLE II. PERFORMANCE RATINGS:

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{imin} (Ω)	R _{1max} (Ω)
R60-375	60	40	3.75	7.50	3.20	18.75	24.0	0.020	0.080

Order information

Packing

R60	375	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current (A)	K=Kink leads S=Straight leads	R= Tape & Reel U= Bulk packaged	R60-375	-	500

Tape & Reel packaging per EIA468-B stan

Recognition: UL/TÜV, approved.

E201504/E319079

R 50274672

2015/863/EU

EN14582

