

**SEA&LAND ELECTRONIC CORP.**

13F.,No.120-10,  
Sec.3,Zhongshan Rd.,Zhonghe City,Taipei County,  
Taiwan, R.O.C.

Tel.: 886-2-8221-2567

Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**

Resettable Fuse

PRODUCT: R60-135

DOCUMENT: QR0429

ECN. NO.:

REV LETTER:

REV DATE: 2020-12-16

PAGE NO.: 1 of 1

## Specification Sheet

Insulating Material:  
meets UL94 V-0 Requirements

Lead-free,RoHS compliant

Lead Material:  
Tin plated copper, 20AWG (0.032"Dia)

Marking:


ChipFast Logo



R60 - Radial type 60V

135 - hold current

XXXXY - Date code & Factory code

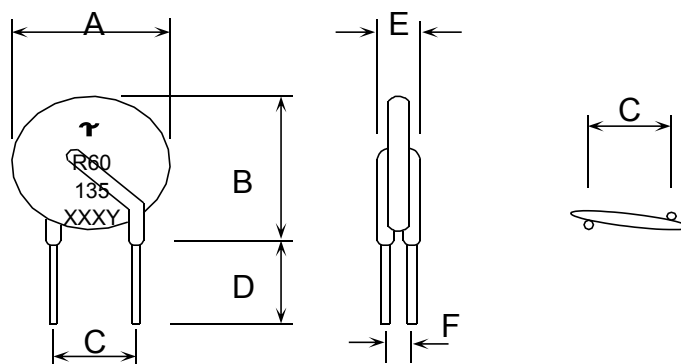

**TABLE I. DIMENSIONS:**

	A	B	C	D	E	F
	MAX	MAX	TYP	MIN	MAX	MAX
mm	14.5	19.6	5.1	7.6	3.1	1.2
in	0.57	0.77	0.20	0.30	0.12	0.05

**TABLE II. PERFORMANCE RATINGS:**

Model	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	Rimin (Ω)	R1max (Ω)
R60-135	60	40	1.35	2.70	1.70	6.75	9.6	0.100	0.300

### Order information

### Packing

R60	135	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current (A)	K=Kink leads S=Straight leads	R= Tape & Reel U= Bulk packaged	R60-135	1500	500

Tape & Reel packaging per EIA468-B stan

Recognition: UL/TÜV, approved.

**E201504/E319079**

**R 50274672**

**2015/863/EU**

**EN14582**

