

**SEA&LAND ELECTRONIC CORP.**  
 13F., No.120-10,  
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,  
 Taiwan  
 Tel.: 886-2-8221-2567  
 Fax.: 886-2-2225-7268

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: R30-400  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2020/12/16  
 PAGE NO.: 1 of 1

## Specification Sheet


Insulating Material:  
 Meets UL94 V-0 Requirements

Lead-Free, RoHS Compliant

Lead Material:  
 Tin Plated Copper, 20AWG (0.032"Dia)

Marking:

**SL** Sea&Land Logo  
 R30 Radial Type 30V  
 400 Hold Current  
 XXXY Date Code & Factory Code

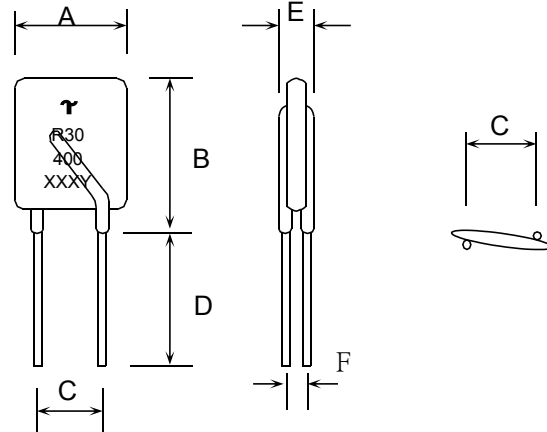

**TABLE I. DIMENSIONS:**

	A	B	C	D	E	F
	MAX	MAX	TYP	MIN	MAX	MAX
mm	14.0	20.1	5.1	7.6	3.0	1.2
in	0.55	0.79	0.20	0.30	0.12	0.05

**TABLE II. PERFORMANCE RATINGS:**

Model	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R <sub>imin</sub> (Ω)	R <sub>1max</sub> (Ω)
R30-400	30	40	4.00	8.00	2.5	20.0	12.7	0.010	0.050

### Order Information

### Packing

R30	400	K or S	R or U	Model	Reel Q'ty	Bag Q'ty
Radial type 30 V (A)	Hold Current (A)	K= Kink leads S= Straight leads	R= Tape & reel U= Bulk packaged	R30-400	1500	500

Tape & Reel packaging per EIA468-B stan

Recognition: UL/TÜV, approved.

E201504/E319079  
 R 50274672  
 2015/863/EU  
 EN14582

