



SEA & LAND ELECTRONIC CORP.

[www.sealand-pptc.com](http://www.sealand-pptc.com)

ALPHA-TOP TECHNOLOGY CORP.

[www.alpha-top.cn](http://www.alpha-top.cn)

## APPROVAL SHEET

MODEL NO.: SMD Series

CUSTOMER:

CUSTOMER'S APPROVAL:

AUTHORIZED SIGNATURE/STAMP:

DATE

### MANUFACTURER:

HEAD OFFICE:

13F.,No.120-10,Sec.3,Zhongshan Rd.,Zhonghe Dist.,New Taipei City 23544,Taiwan  
Tel: 886-2-8221-2567  
Fax:882-2-2225-7268  
E-mail:service@chipfast.com.tw

China Branch:

Factory Building B)Shuangpeng,Weibu Village, Qiuchang Town,  
Huiyang District, Huizhou City, Guangdong Province, P.R.C.)  
Tel: 86-752-3562001  
Fax:86-752-3558696  
E-mail:service@atpptc.com

Submitted by: Chen  
Approved by: YC Lin  
DATE: 13-Mar-26

SEA & LAND ELECTRONIC CORP.



**Features**

- Surface Mount Devices
- Lead free device
- Size 7.5\*5.5 mm 0.29\*0.20 inch
- Surface Mount packaging for automated assembly

**Applications**

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Computer mother board, Modem.
  - Telecommunication equipments.

**SMD Series**

Alpha-Top (Sea & Land Alliance)


**Performance Specification**

Model	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec)	R <sub>imin</sub> (Ω)	R <sub>1max</sub> (Ω)	UL	CQC
SMD020L-100V	100	40	0.20	0.45	1.8	1.5	3.0	0.400	5.500		
SMD030L	60	100	0.30	0.60	1.5	1.5	3.0	0.600	4.800	✓	✓
SMD050L	60	100	0.50	1.00	1.5	2.5	4.0	0.180	1.400	✓	✓
SMD075L	33	100	0.75	1.50	1.5	8.0	0.3	0.100	1.000	✓	✓
SMD075L-60V	60	100	0.75	1.50	1.5	8.0	0.3	0.100	1.000	✓	✓
SMD075L-72V	72	100	0.75	1.50	1.5	8.0	0.3	0.100	1.000		
SMD100L	33	100	1.10	2.20	1.5	8.0	0.5	0.065	0.410	✓	✓
SMD100L-60V	60	100	1.10	2.20	1.5	8.0	0.5	0.065	0.410	✓	✓
SMD100L-72V	72	100	1.10	2.20	1.5	8.0	0.5	0.065	0.410		
SMD125L	33	100	1.25	2.50	1.5	8.0	2.0	0.050	0.250	✓	✓
SMD125L-60V	60	100	1.25	2.50	1.5	8.0	2.0	0.050	0.250	✓	✓
SMD150L	33	100	1.50	3.00	1.5	8.0	2.0	0.035	0.230	✓	✓
SMD150L-60V	60	100	1.50	3.00	1.5	8.0	2.0	0.035	0.230		
SMD185L	33	100	1.85	3.70	1.5	8.0	2.5	0.030	0.150	✓	✓
SMD185L-60V	60	100	1.85	3.70	1.5	8.0	2.5	0.030	0.180		
SMD200L-6V	6	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120	✓	✓
SMD200L-12V	12	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120	✓	✓
SMD200L	16	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120	✓	✓
SMD200L-24V	24	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120	✓	✓
SMD200L-30V	30	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120		
SMD200L-33V	33	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120	✓	✓
SMD200L-36V	36	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120		✓
SMD200L-48V	48	100	2.00	4.00	1.5	8.0	4.5	0.020	0.120		✓
SMD250L	16	100	2.50	5.00	1.5	8.0	16.0	0.020	0.085	✓	✓
SMD250L-24V	24	100	2.50	5.00	1.5	8.0	16.0	0.020	0.085	✓	✓
SMD250L-30V	30	100	2.50	5.00	1.5	8.0	16.0	0.020	0.085	✓	✓
SMD250L-33V	33	100	2.50	5.00	1.5	8.0	16.0	0.020	0.085	✓	✓
SMD260L	6	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075	✓	✓
SMD260L-12V	12	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075	✓	✓
SMD260L-16V	16	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075	✓	✓
SMD260L-24V	24	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075	✓	✓
SMD260L-33V	33	100	2.60	5.20	1.5	8.0	10.0	0.014	0.075	✓	✓
SMD300L	6	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-12V	12	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-13.2V	13.2	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-16V	16	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-24V	24	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-30V	30	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-33V	33	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-36V	36	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD300L-48V	48	100	3.00	6.00	1.5	8.0	20.0	0.012	0.048	✓	✓
SMD330L	6	40	3.30	6.50	1.5	12.0	20.0	0.012	0.045		✓
SMD330L-16V	16	40	3.30	6.50	1.5	12.0	20.0	0.012	0.045		✓
SMD330L-24V	24	40	3.30	6.50	1.5	12.0	20.0	0.012	0.045		✓
SMD330L-33V	33	40	3.30	6.50	1.5	12.0	20.0	0.012	0.045		✓
SMD400L	6	100	4.00	8.00	1.5	16.0	20.0	0.012	0.035	✓	✓
SMD400L-12V	12	100	4.00	8.00	1.8	16.0	20.0	0.012	0.035	✓	✓
SMD400L-13.2V	13.2	100	4.00	8.00	1.8	16.0	20.0	0.012	0.035	✓	✓
SMD400L-16V	16	100	4.00	8.00	1.8	16.0	20.0	0.012	0.035	✓	✓
SMD400L-24V	24	100	4.00	8.00	1.8	16.0	20.0	0.012	0.035	✓	✓
SMD400L-30V	30	100	4.00	8.00	1.8	16.0	20.0	0.012	0.035		✓
SMD450L-16V	16	100	4.50	9.00	1.8	16.0	20.0	0.008	0.032		✓
SMD500L	6	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031	✓	✓
SMD500L-12V	12	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031	✓	✓
SMD500L-13.2V	13.2	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031	✓	✓
SMD500L-16V	16	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031	✓	✓
SMD500L-24V	24	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031	✓	✓
SMD500L-30V	30	100	5.00	10.00	1.8	20.0	10.0	0.005	0.031		✓
SMD600L	6	100	6.00	12.00	1.8	25.0	8.0	0.004	0.026	✓	✓
SMD600L-13.2V	13.2	100	6.00	12.00	1.8	25.0	8.0	0.004	0.026	✓	✓
SMD600L-16V	16	100	6.00	12.00	1.8	25.0	8.0	0.004	0.026	✓	✓
SMD600L-24V	24	100	6.00	12.00	1.8	25.0	8.0	0.004	0.026	✓	✓

**I<sub>hold</sub>** = Hold Current. Maximum current device will not trip in 25°C still air.  
**I<sub>trip</sub>** = Trip Current. Minimum current at which the device will always trip in 25°C still air.  
**V<sub>max</sub>** = Maximum operating voltage device can withstand without damage at rated current (I<sub>max</sub>).  
**I<sub>max</sub>** = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).  
**P<sub>d</sub>** = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.  
**R<sub>imin</sub>/max** = Minimum/Maximum device resistance prior to tripping at 25°C.  
**R<sub>1max</sub>** = Maximum device resistance is measured one hour post reflow.  
**CAUTION** : Operation beyond the specified ratings may result in damage and possible arcing and flame.

**Environmental Specifications**


Test	Conditions
Passive aging	+85°C, 1000 hrs.
Humidity aging	+85°C, 85% R.H., 168 hours
Thermal shock	+85°C to -40°C, 20 times
Resistance to solvent	MIL-STD-202, Method 215
Vibration	MIL-STD-202, Method 201
Ambient operating conditions : - 40 °C to +85 °C	
Maximum surface temperature of the device in the tripped state is 125 °C	
In case of special use, please contact our engineer	



# SMD Series

Alpha-Top (Sea & Land Alliance)

Agency Approvals :



E201504(Alpha-Top)/E319079(Sea&Land)

CQC25001473187

Regulation/Standard:

2015/863/EU

EN14582

## I<sub>hold</sub> Versus Temperature

Model	Maximum ambient operating temperature (T <sub>max</sub> ) vs. hold current (I <sub>hold</sub> )									
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C	
SMD030L	0.45	0.40	0.35	0.30	0.25	0.23	0.20	0.17	0.14	
SMD050L	0.76	0.67	0.59	0.50	0.42	0.38	0.33	0.29	0.23	
SMD075L	1.13	1.01	0.88	0.75	0.62	0.56	0.50	0.44	0.34	
SMD100L	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50	
SMD125L	1.89	1.68	1.46	1.25	1.04	0.94	0.83	0.73	0.56	
SMD150L	2.27	2.01	1.76	1.50	1.25	1.13	1.00	0.87	0.74	
SMD185L	2.80	2.47	2.17	1.85	1.54	1.39	1.22	1.07	0.85	
SMD200L	3.02	2.68	2.34	2.00	1.66	1.50	1.32	1.16	0.90	
SMD250L	3.78	3.35	2.93	2.50	2.08	1.88	1.65	1.45	1.13	
SMD260L	3.64	3.25	2.91	2.60	2.26	2.08	1.95	1.74	1.13	
SMD300L	4.53	4.02	3.51	3.00	2.52	2.26	1.99	1.75	1.34	
SMD330L	4.72	4.22	3.72	3.30	2.70	2.45	2.16	1.91	1.47	
SMD400L	5.97	5.30	4.66	4.00	3.36	3.04	2.71	2.38	1.83	
SMD450L	5.97	5.30	4.66	4.00	3.36	3.04	2.71	2.38	1.83	
SMD500L	7.55	6.70	5.85	5.00	4.15	3.75	3.30	2.90	2.25	
SMD600L	8.60	7.75	6.89	6.00	5.04	4.56	3.96	3.54	2.76	
SMD700L	9.50	8.70	7.90	7.00	6.40	5.85	5.40	4.80	3.95	
SMD800L	10.80	9.76	8.80	8.00	6.56	6.08	5.44	4.80	3.68	

## Construction And Dimension (Unit:mm)

Model	A		B		C		D		E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
SMD020L	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD030L	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD050L	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD075L	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD075L-60V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD075L-72V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD100L	6.73	7.98	4.80	5.44	0.40	1.00	0.30	0.30	0.30	0.30
SMD100L-60V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD100L-72V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD125L	6.73	7.98	4.80	5.44	0.40	0.90	0.30	0.30	0.30	0.30
SMD125L-60V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD150L	6.73	7.98	4.80	5.44	0.40	0.90	0.30	0.30	0.30	0.30
SMD150L-60V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD185L	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD185L-60V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD200L-6V	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD200L-12V	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD200L	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD200L-24V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD200L-30V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD200L-33V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD200L-36V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD200L-48V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD250L	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD250L-24V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD250L-30V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD250L-36V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD260L	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD260L-12V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD260L-16V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD260L-24V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD260L-33V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD300L	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD300L-12V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD300L-13.2V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD300L-16V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD300L-24V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD300L-30V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD300L-33V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD300L-36V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD300L-48V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD330L	6.73	7.98	4.80	5.44	0.30	0.90	0.30	0.30	0.30	0.30
SMD330L-16V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD330L-24V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD330L-33V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD400L	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30	0.30	0.30
SMD400L-12V	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30	0.30	0.30
SMD400L-13.2V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD400L-16V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD400L-24V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD400L-30V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD450L-16V	6.73	7.98	4.80	5.44	0.60	1.30	0.30	0.30	0.30	0.30
SMD500L	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30	0.30	0.30
SMD500L-12V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD500L-13.2V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD500L-16V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD500L-24V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30
SMD500L-30V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30	0.30	0.30




# SMD Series

Alpha-Top (Sea & Land Alliance)


## Construction And Dimension (Unit:mm)

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD600L	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30
SMD600L-13.2V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD600L-16V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD600L-24V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD700L	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30
SMD700L-12V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD700L-13.2V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD700L-16V	6.73	7.98	4.80	5.44	0.90	1.80	0.30	0.30
SMD800L	6.73	7.98	4.80	5.44	0.40	1.30	0.30	0.30

### Dimensions & Marking

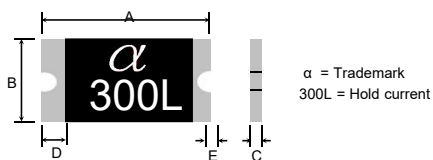

### Recommended Pad Layout (mm)




### Termination Pad Characteristics

Terminal pad materials: Gold-Plated Nickel-Copper or Tin-plated Nickel-Copper  
 Terminal pad solderability: Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


### Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

### Thermal Derating Curve

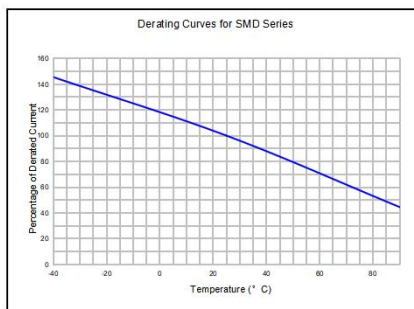

### Typical Time-To-Trip At 25°C

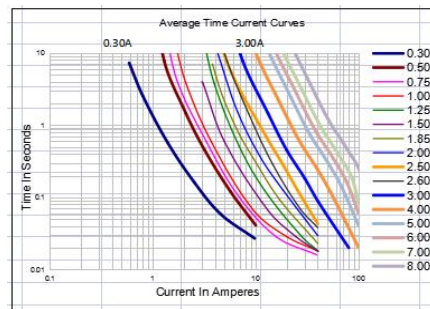

## ! WARNING:


- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability performance of our devices.



## SMD Series

Alpha-Top (Sea & Land Alliance)

### Recommended Solder Reflow Conditions

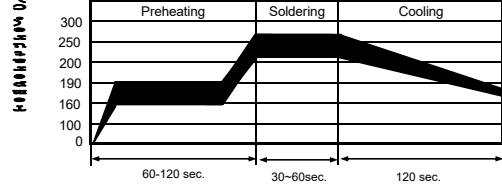

Recommended reflow methods: IR, vapor phase oven, hot air oven.

Devices are not designed to be wave soldered to the bottom side of the board.

Recommended maximum paste thickness is 0.25 mm (0.010 inch).

Devices can be cleaned using standard method and solvents.

Note: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Reflow welding is recommended to be completed once.

According to the standard industry practice, if there is rework, it must be replaced with a new dismantling device.


### Tape And Reel Specifications (mm)

Governing Specifications	EIA 481-2
W	16.0 ± 0.3
P <sub>0</sub>	4.0 ± 0.10
P <sub>1</sub>	8.0 ± 0.10
P <sub>2</sub>	2.0 ± 0.05
A <sub>0</sub>	5.70 ± 0.10
B <sub>0</sub>	8.00 ± 0.10
B <sub>1</sub> max.	12.1
D <sub>0</sub>	1.5 + 0.1, -0
F	7.5 ± 0.05
E <sub>1</sub>	1.75 ± 0.10
E <sub>2</sub> min.	14.25
T <sub>1</sub> max.	0.6
T <sub>2</sub> max.	0.1
K <sub>0</sub>	0.80 ± 0.1
Leader min.	390
Trailer min.	160
<b>Reel Dimensions</b>	
A max.	178
N min.	60
W <sub>1</sub>	16.4 + 2.0, -0.0
W <sub>2</sub> max.	22.4

### EIA Tape Component Dimensions

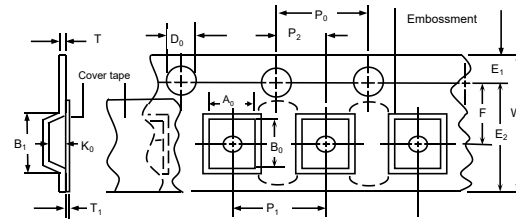

### EIA Reel Dimensions

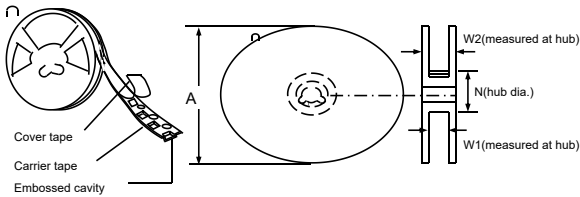

### Storage And Handling

- Storage conditions: 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

### Order Information

### Packaging

SMD	050L	Tape & Reel Quantity				
Product name	Hold	075L-60V	100L-60V	185L	200L-24V/33V	250L-30V
Size 7555 mm /2920 inch	Current	300L-24V/30V	400L-24V	500L	600L	700L 800L 1500PCS/reel
SMD: surface mount device	0.50A	030L	050L	075L	100L	125L 200L 250L 260L 300L 400L 2000PCS/reel

Tape & reel packaging per EIA481-1

### Labeling Information

**Sea & Land Electronic Corp.**

Model:  
Part no.:  
Spec.:  
Lot no.:  
Q'ty:

倉儲：密封！溫度：18~33℃/湿度：30~60% A