

SEA&LAND ELECTRONIC CORP.

13F., No.120-10,
 Sec. 3, Zhongshan Rd., Zhonghe Dist., New Taipei City 235,
 Taiwan
 Tel.: 886-2-8221-2567
 Fax.: 886-2-2225-7268

Techfuse
PTC Devices
 Resettable Fuse

PRODUCT: mSMD150
 DOCUMENT: QR0429
 ECN. NO.:
 REV LETTER:
 REV DATE: 2026/3/20
 PAGE NO.: 1 of 1

Specification Sheet

Terminal Pad Solderability:
 Meets EIA Specification RS186-9E
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:

α Alpha Logo
 150 Part Identification

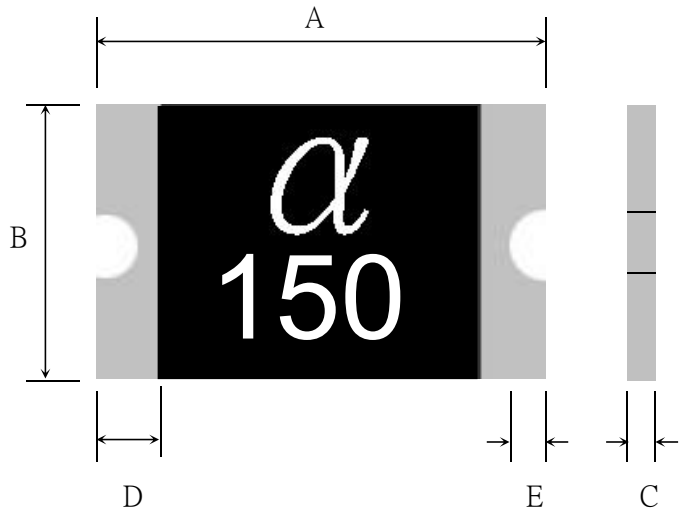


TABLE I. DIMENSIONS:

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
mSMD150	4.37	4.73	3.07	3.41	0.40	0.90	0.30	0.25

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (V)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
mSMD150	8.0	100	1.50	3.00	0.8	8.0	0.50	0.040	0.160

Order Information


Packaging

mSMD1812	150	Tape & Reel Quantity
Product name	Hold	Max
Size 4532 mm /1812 mils	Current	voltage
SMD: surface mount device	1.50A	1500 pcs/reel

Recognition:

Agency Approvals :  E201504/E319079

 R 50481056

 CQC25001473187
 GB 4943.1-2022; IEC 60730-1 : 2013 15、17、J.15、J.17; GB/T 7153-200

Regulation/Standard: 2015/863/EU



EN14582

